


instructions for barcode readers

HD-SL99




Débit en baud 4800 bits

Baud rate 4800 bits

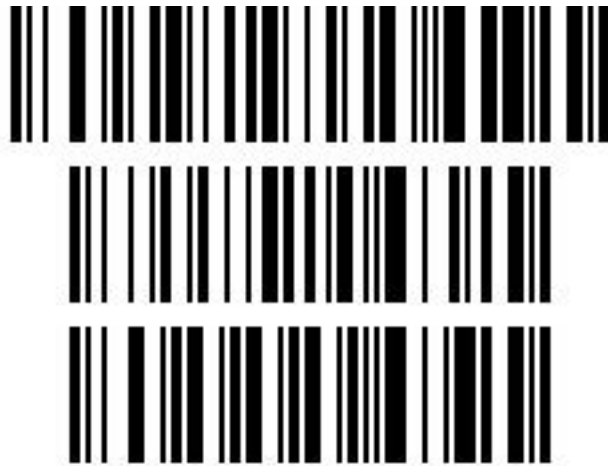


Débit en baud 9600 bits

Baud rate 9600 bits

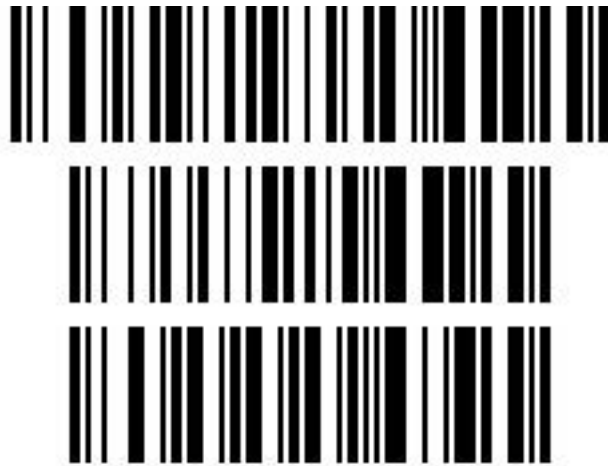


19200 Conseils

19200 hd-sl99

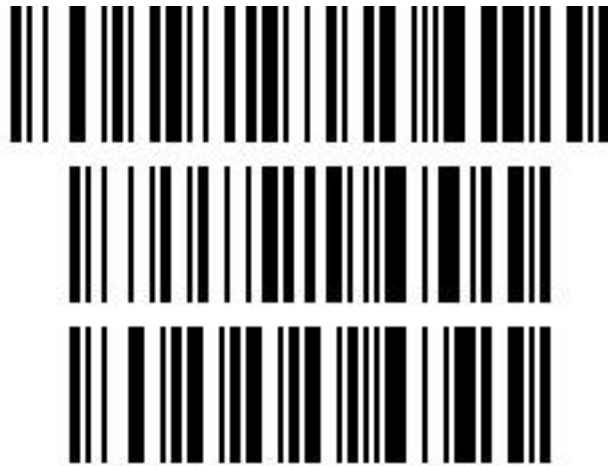


Vitesse de transmission 115200 bits

Baud rate 115200 bits

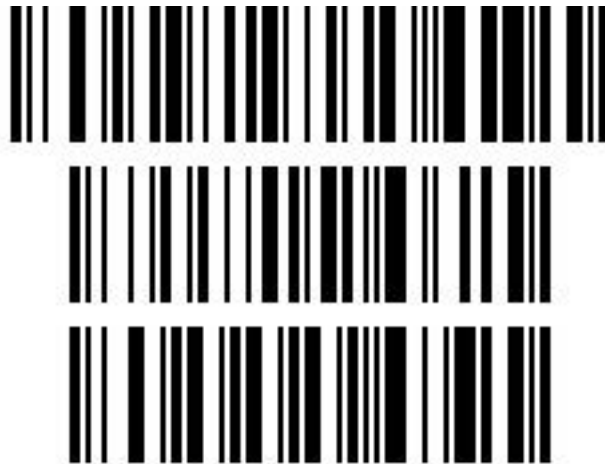


AUCUN ensemble de parité

NONE parity set

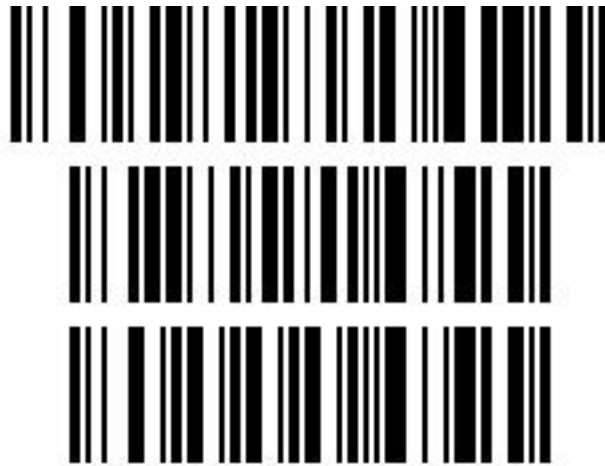


Ensemble de parité EVEN

EVEN parity set

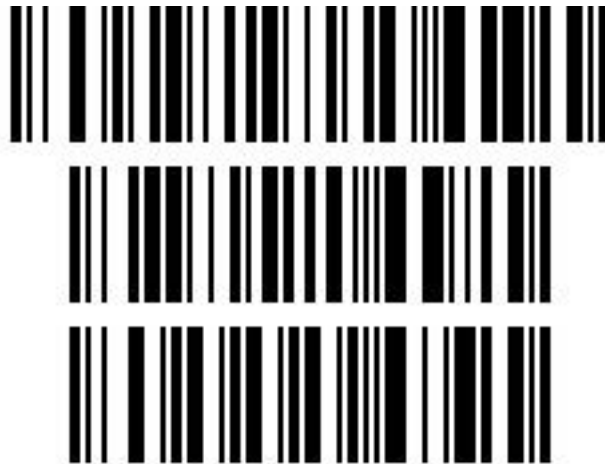


Ensemble de parité ODD

ODD parity set

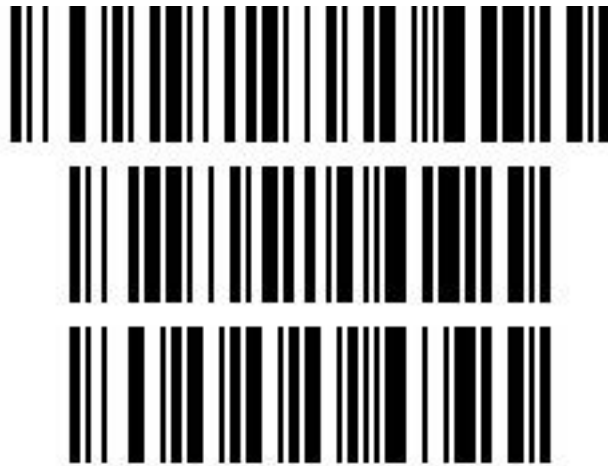


Ensemble de parité SPACE

SPACE parity set

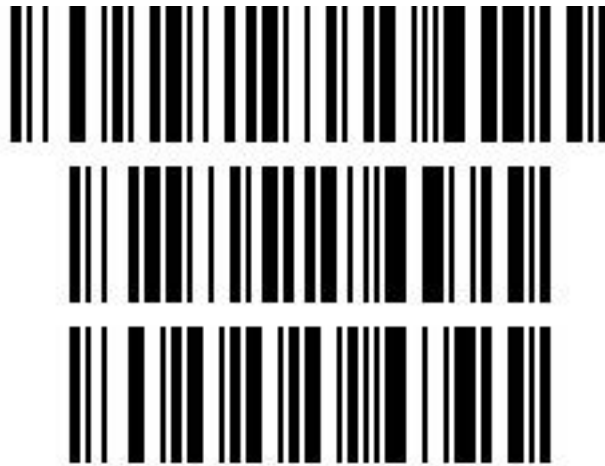


MARK ensemble de parité

MARK parity set

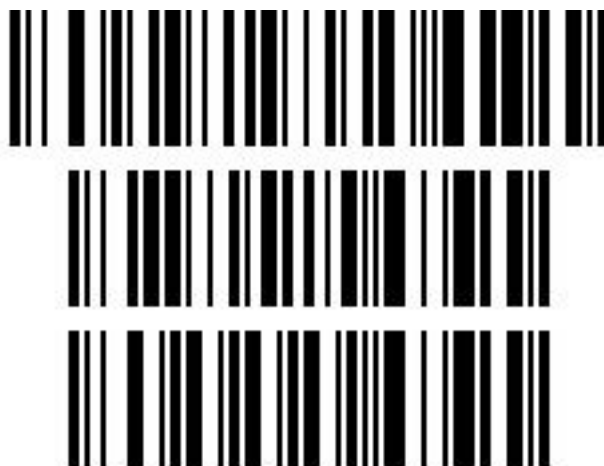

Activer CTS / RTS

Enable CTS/RTS

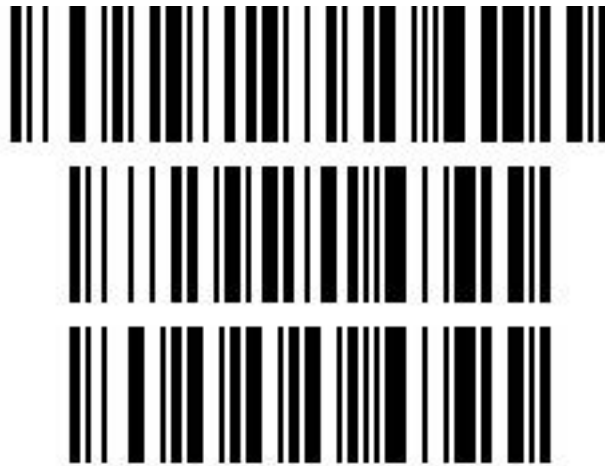

Désactiver CTS / RTS

Disable CTS/RTS

