

# instructions for barcode readers

---

**HD29A**



**Baud rate 2400 bits**




**Baud rate 4800 bits**



## Baud rate 9600 bits




**Baud rate 19200 bits**

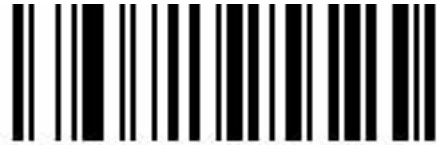

**Baud rate 38400 bits**



**Baud rate 57600 bits**

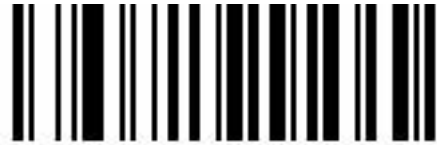





## Data 8 bits



## 1 Stop bit



## 2 Stop bit

